


FLOORING MAINTENANCE GUIDE: URETHANE FINISH

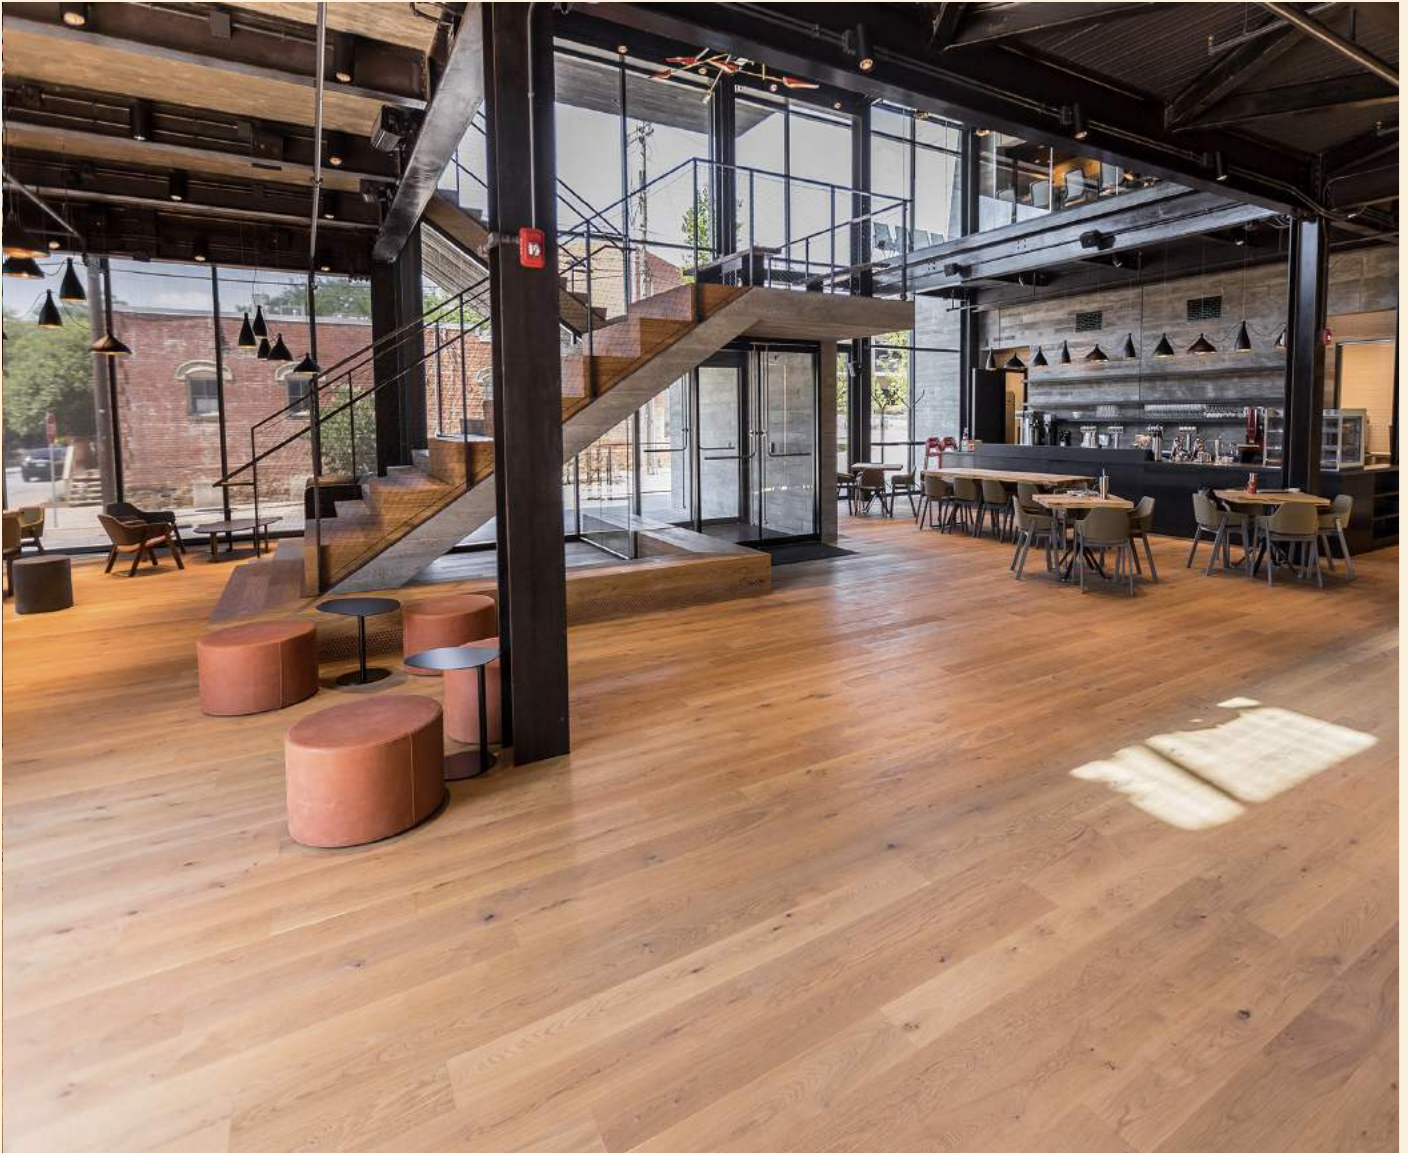

Urethane finished maintenance information for Delta Millworks engineered European oak flooring products with 1/2", 5/8" and 3/4" thickness options.

WWW.DELTAMILLWORKS.COM

TABLE OF CONTENTS

HUMIDITY & TEMPERATURE	1
URETHANE WOODEN FLOORS	2
PRODUCT TECHNICAL SHEET BONA WOOD FLOOR CLEANER	2
PRODUCT TECHNICAL SHEET BONA WOOD FLOOR SPRAY MOP	3

ADVICE & PRECAUTIONS

Urethane finished maintenance information for Delta Millworks engineered European oak flooring products with 1/2", 5/8" and 3/4" thickness options.

HUMIDITY & TEMPERATURE

1. Clean the flooring regularly with a vacuum cleaner or soft broom. Dirt and sand particles can damage the floor surface.
2. Remove stains immediately with a well-wrung cloth.
3. Wipe up spills immediately to prevent them from seeping into the wood floor.
4. Do not clean the floor with pure water; always use a maintenance product.
5. Do not use traditional cleaning products.
6. Place mats on flooring near outside doors.
7. Place carpets in high traffic areas.
8. Move carpets as they block sunlight; discoloration may occur under the carpet.
9. Place protective pads on the legs of chairs and tables.
10. Avoid wearing stiletto heels on the wood flooring.
11. Do not drag heavy objects; lift them to avoid scratching.
12. Be careful with open windows; rainwater can damage the flooring.
13. Avoid direct sunlight on the floor. When exposed to direct sunlight or strong artificial light. All floor coverings change over time, causing oxidation and darkening in light woods and fading in dark woods. This is characteristic of wood and not a defect.
14. If the house is to remain closed for a period of time, it is especially recommended to maintain proper

temperature and humidity to prevent the wood floor from swelling or cracking.

15. Do not stick adhesive tapes on the wood floor. The solvents contained in the adhesive tape may remove the finish from the wood floor.

Wood is subject to natural dimensional variations depending on environmental conditions. To avoid undesirable behavior, such as pronounced cracks or deformations in the pavement layers, it is recommended to maintain relative humidity values between 40% and 65% and a temperature between 59 and 86°F. Depending on the environmental conditions of temperature and humidity, this corresponds to the equilibrium humidity values of the wood itself. To achieve the maximum performance, keep the product in the recommended conditions of humidity and temperature:

a. Constant temperature of the casing between 64.4 and 71.6 °F.

b. The humidity in the home is between 35% and 70% of the limits accepted as healthy by the World Health Organization.

Delta Millworks advises you to pay special attention to these values and recommends the installation of humidifiers and/or dehumidifiers in homes.

<p>URETHANE WOODEN FLOORS</p>	<p>PRODUCT TECHNICAL SHEET: BONA WOOD FLOOR CLEANER</p>
<p>Regular cleaning and maintenance of your wood floor is the best way to bring out the beauty of your wood flooring and make it look like new. Follow our recommendations so you can enjoy a wooden floor for a long time.</p> <p>Urethane on wood floors is one of the most common treatments for these surfaces. The urethane comes in different levels of gloss, from completely matt to glossy. Wood floors treated with urethane is very resistant to abrasion and chemicals. It is important that you clean and maintain urethane wood floors properly.</p>	<p>Bona Wood Floor Cleaner is specially designed for effective cleaning of urethane and wax-treated wood floors. It's safe and easy to use, and leaves no residue or opacity.</p>
<p>CLEANING WOODEN FLOORS</p>	<p>PREPARATION</p>
<p>Things you need to know to clean an urethane wood floor: Protecting wood floors is easy. Regular cleaning will remove dust and dirt before the finish gets scratched, worn and loses its shine.</p> <p>Always avoid excess water when cleaning your wood floor. If you spill (food or drink), clean the floor immediately to avoid permanent damage or stains. Sweep the wood floor or vacuum frequently. Use Bona's Dusting Pad to remove dust and lint. Then clean the floor with Bona's mild, specially formulated wood floor cleaner, or the Bona Spray Mop, simply spray.</p> <p>Do not use "all purpose" cleaners on wooden floors, as they often leave a matte residue and end up using a lot of water, which damages wooden floors.</p>	<p>Vacuum the floor before wet cleaning to ensure that dirt and loose grit are removed.</p>
<p>WOODEN FLOOR MAINTENANCE</p>	<p>APPLICATION</p>
<p>Things to keep in mind to maintain your urethane wood floor: if your wood floors have lost their shine or have small scratches, you can use Bona Restorer to revive them.</p> <p>Polish and refresher add gloss to dull wood floors and act as a protective layer against wear and tear.</p> <p>If the wood floor has been laid in an area where there is a high likelihood of water spillage, such as a kitchen or bathroom, apply a restorer to add a protective layer to new wood floors.</p> <p>The restorer can be applied when necessary, but usually a few times a year. Always make sure the wood floor is</p>	<ol style="list-style-type: none"> 1. Spray a small section of the floor with Wood Floor Cleaner 2. Clean that section using a Bona Cleaner Mop Refill. Rinse or replace the mop refill when it is dirty. <div data-bbox="922 1289 1495 1839" data-label="Image"> </div> <p>pH: approx. 7 Duration: 3 years Storage: > +41°F < +77°C</p>

**PRODUCT TECHNICAL SHEET:
BONA SPRAY MOP**

The Bona Spray Mop allows you to clean and maintain your wood floors. The Bona Spray Mop is ergonomic and easy to use. It is assembled and filled quickly with Bona's floor cleaner cartridge.

PREPARATION

Vacuum the floor before wet cleaning to ensure that dirt and loose grit are removed.

APPLICATION

1. Insert the Wood Floor Cleaner into the Bona Spray Mop. Squeeze it well to enter your cavity.
2. Attach the mop refill to the mop head. Spray the floor with cleaner and wipe the mop.

RECCOMENDATION

For stubborn stains, spray the cleaner directly onto the stain and allow it to work for a few minutes. Then scrub the stain until it is removed. Soiled mop refills should be washed at 60°C and without fabric softener.



DELTA MILLWORKS

4701 East 5th. Street
Austin, Texas 78702
512.385.1812 | info@deltamillworks.com